


# KEYENCE




**NEW** Ultra-compact 1D and 2D Code Reader  
SR-700 Series



**ULTRA-COMPACT  
HIGH PERFORMANCE  
READING**

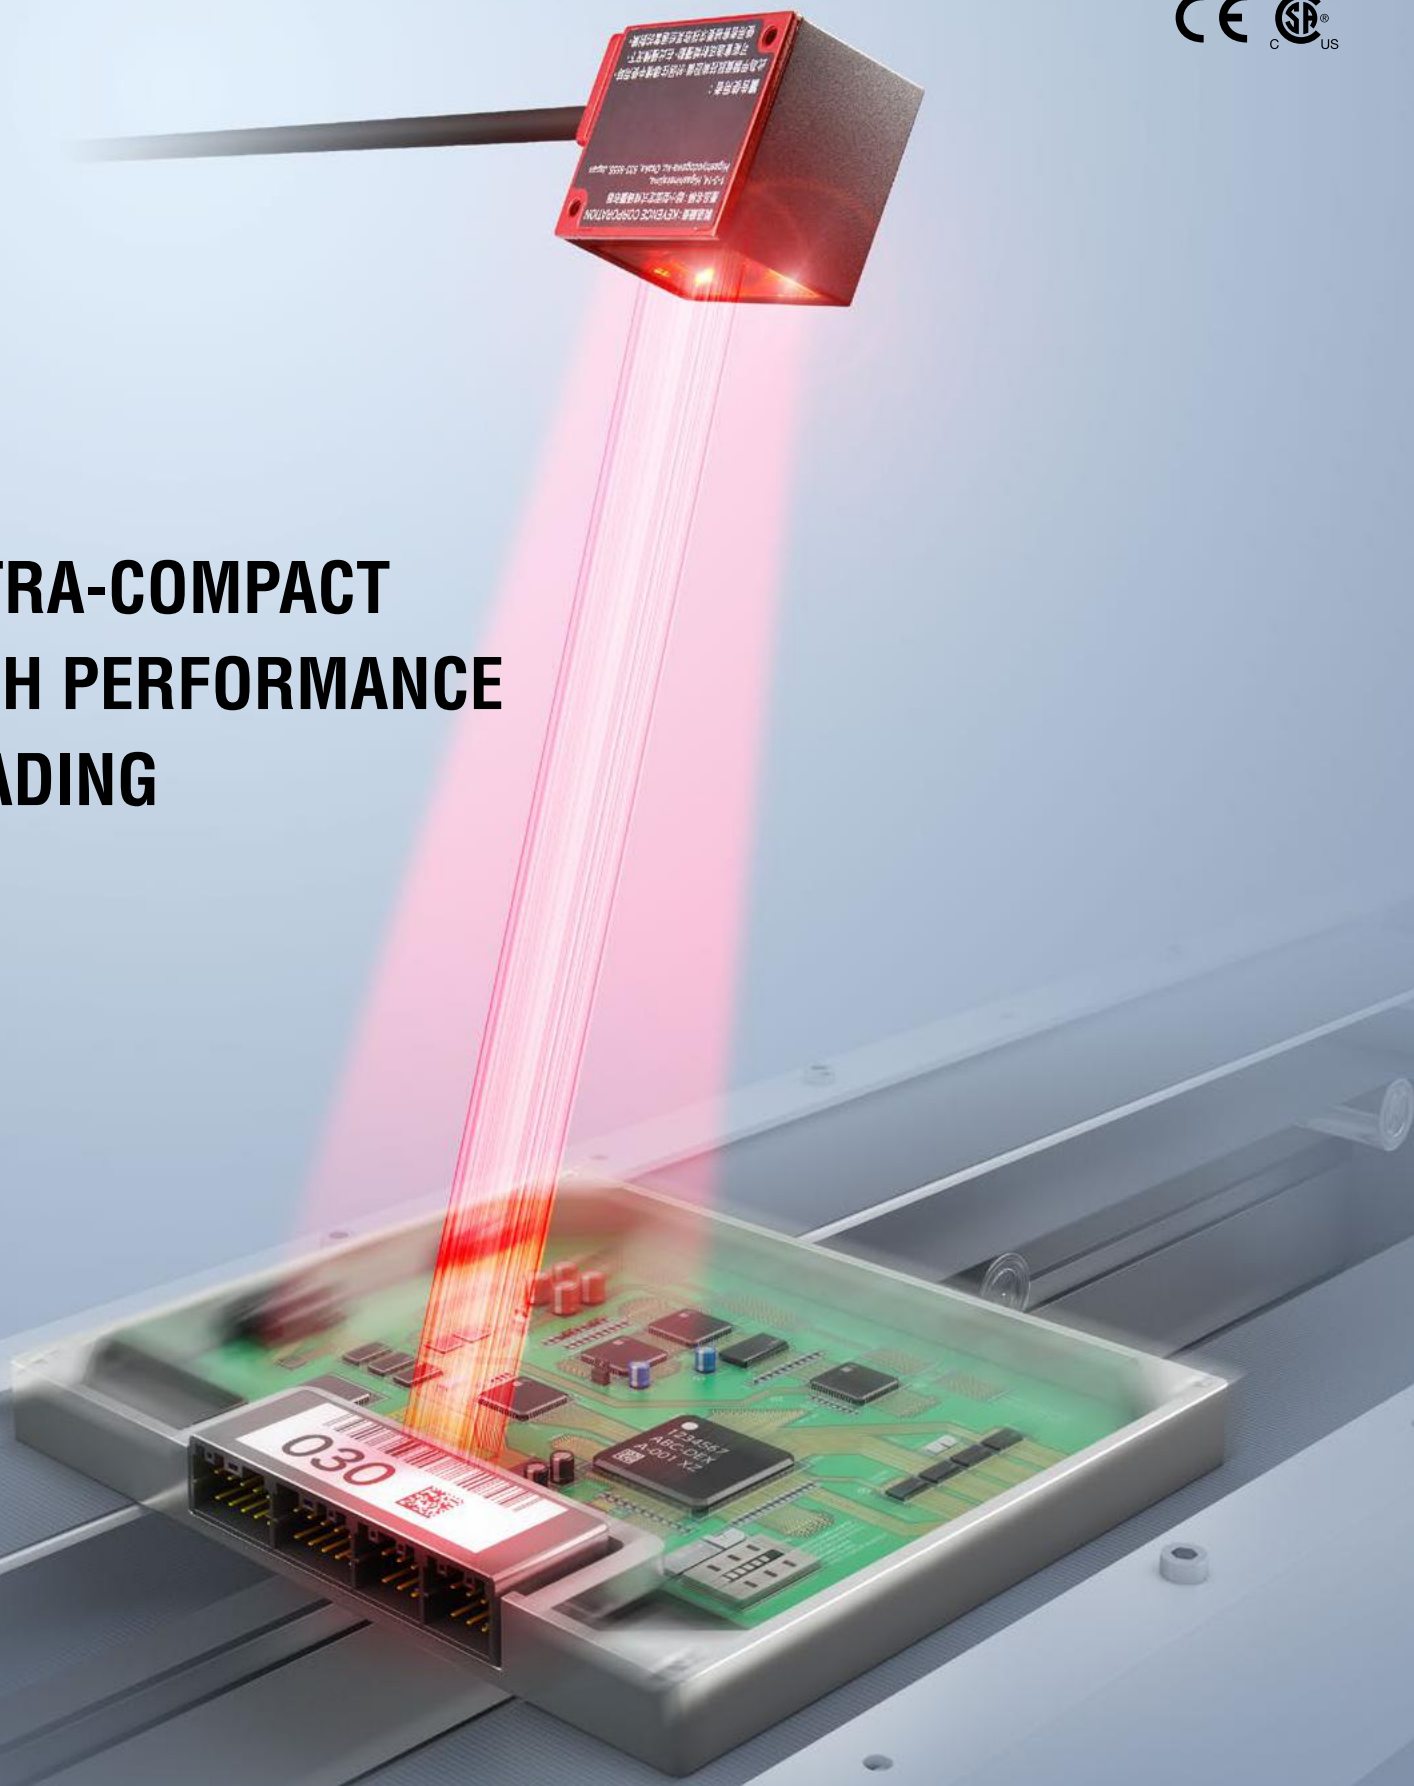

**SR-700** Series

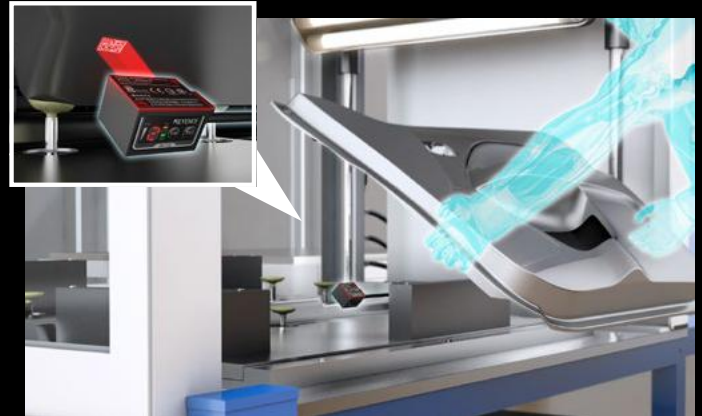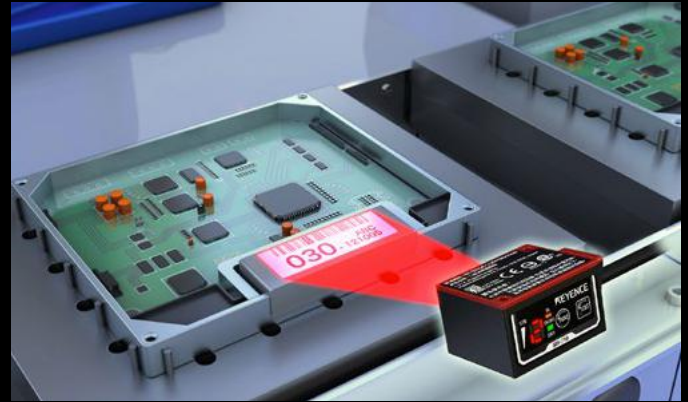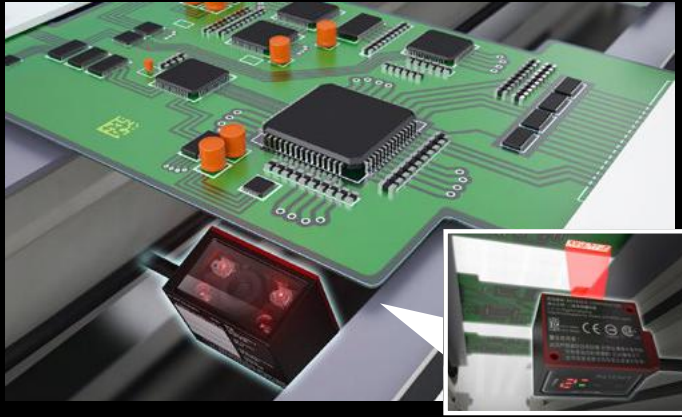

## C O M P A C T B O D Y

### ADVANCED PROCESSING FOR STABLE, HIGH-QUALITY READING

#### EXCELLENT READING CAPABILITY THROUGHOUT THE FIELD OF VIEW

A built-in lens minimizes aberration to ensure stable reading even at the edges of the field of view.



#### READING UNAFFECTED BY MOUNTING ANGLE

Geometric correction enables reliable code reading even when the code appears distorted.



#### EASILY READ DAMAGED OR IRREGULARLY PRINTED CODES

New algorithms provide best-in-class reading capability even when the code is hard to read.



### POWERFUL HIGH SPEED READING

#### BURST READ FUNCTION:

Acquires up to 10 consecutive images. The decoding process is performed after imaging for high speed code detection.


#### HIGH-SPEED IMAGE CAPTURE:

The built-in ultra-high-intensity LED and high-speed digital signal processor (DSP) capture moving objects effectively, even with a short exposure time. (Reference: Max. 170 m/min with a KEYENCE test label)

## EASY TUNING

### Easily optimize reading settings

The optimal brightness and filter settings are automatically selected using the buttons on the main unit.



Tuning is also available through the setting software.  
**SR-H6W**

## BUILT-IN TEST MODE

### Visual indication of reading success

Pressing the TEST button starts the reading rate measurement mode.



## CODE VERIFICATION FUNCTION

### Verification based on code quality standards

OUTPUT DATA **AD-ERMT-55841:B**

### TOTAL GRADE JUDGMENT

Judgment can also be performed for each grading criteria

\*This function is designed for 2D codes (QR, DataMatrix, GS1 Composite, PDF417).



### SUPPORTED STANDARDS

- ISO/IEC 15415
- ISO/IEC TR 29158(AIM DPM-1-2006)
- ISO/IEC 16022
- SAE AS9132
- SEMI T10-0701

## MATCHING LEVEL JUDGMENT FUNCTION

### Compare the print quality of scanned codes

Higher contrast and print quality are indicated by a larger matching level, as shown below:


Reading rate **100%**  
Matching level **75**



Reading rate **100%**  
Matching level **43**




## SYSTEM CONFIGURATION DIAGRAM

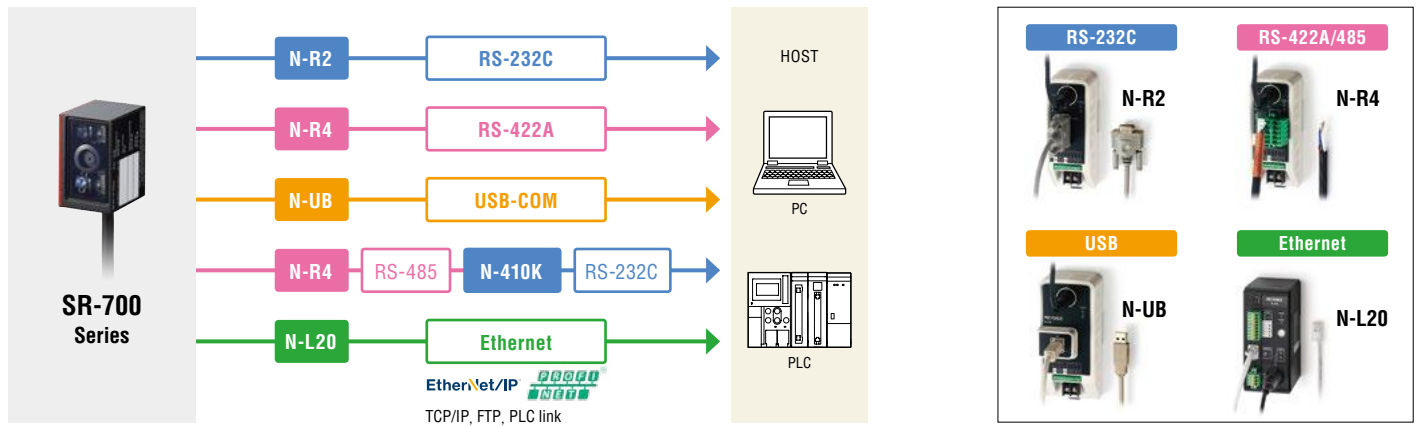

## READING RANGE CHARACTERISTICS [TYPICAL]


### SR-700HA: HIGH-RESOLUTION TYPE

Code type	Cell size	A	B
2D	0.08 0.003"	31 1.22"	39 1.54"
	0.127 0.005"	27 1.06"	42 1.66"
	0.25 0.010"	22 0.87"	50 1.97"




### SR-700: CLOSE-RANGE TYPE

Code type	Cell size Narrow bar width	A	B
2D	0.127 0.005"	50 1.97"	70 2.76"
	0.25 0.010"	40 1.57"	80 3.15"
Barcode	0.127 0.005"	46 1.81"	74 2.91"
	0.33 0.013"	30 1.18"	100 3.94"



### SR-710: MIDDLE-RANGE TYPE

Code type	Cell size Narrow bar width	A	B
2D	0.25 0.010"	65 2.56"	130 5.12"
	0.5 0.020"	45 1.77"	165 6.50"
Barcode	0.127 0.005"	75 2.95"	110 4.33"
	0.5 0.020"	45 1.77"	195 7.68"





## SPECIFICATIONS

### Main unit



Model		SR-700HA		SR-700		SR-710	
Type		High-resolution type		Close-range type		Middle-range type	
Laser pointer	Light source		Visible semiconductor laser (Wavelength: 660 nm)				
	Output		60 μW				
	Pulse duration		200 μs				
	Laser class		Class 1 Laser Product (IEC60825-1, FDA (CDRH) Part 1040.10 <sup>-1</sup> )				
Lighting		Light source		High intensity red LED			
Reading	Supported code	Barcode	*2	CODE39, ITF, 2of5 (Industrial 2of5), COOP 2of5, NW-7 (Codabar), CODE128, GS1-128, GS1 DataBar, CODE93, JAN/EAN/UPC, Trioptic CODE39, CODE39 Full ASCII, Pharmacode			
		2D code	QR, MicroQR, DataMatrix (ECC200), GS1 DataMatrix, PDF417, MicroPDF417, GS1 Composite (CC-A, CC-B, CC-C)				
	Minimum resolution	Barcode	—	0.127 mm 0.005"		0.127 mm 0.005"	
		2D code	0.082 mm 0.003"	0.127 mm 0.005"		0.19 mm 0.008"	
	Reading distance (typical examples)	Barcode	—	30 to 100 mm 1.18" to 3.94" (Narrow bar width = 0.33 mm 0.01")		45 to 195 mm 1.77" to 7.68" (Narrow bar width = 0.5 mm 0.02")	
		2D code	22 to 50 mm 0.87" to 1.97" (Cell size = 0.25 mm 0.01")	40 to 80 mm 1.57" to 3.15" (Cell size = 0.25 mm 0.01")		45 to 165 mm 1.77" to 6.50" (Cell size = 0.5 mm 0.02")	
	Focal distance		38 mm 1.50"	60 mm 2.36"		100 mm 3.94"	
	Field of view (Typical example at focal distance)		26 mm × 17 mm 1.02" × 0.67"	42 mm × 27 mm 1.65" × 1.06"		70 mm × 45 mm 2.76" × 1.77"	
I/O	Control input		2 inputs (IN1 and IN2), non-voltage input (contact, solid-state)				
	Control output		4 NPN open collector outputs (OUT1 to 4) 30 mA or less (24 V or less) Residual voltage 0.8 V or less, leakage current 0.1 mA or less				
	RS-232C	Transmission speed	9600, 19200, 38400, 57600, 115200 bps				
		Supported protocol	No-protocol, MC protocol, SYSWAY, KV STUDIO				
	USB		USB 2.0 Full Speed compliant				
Environmental resistance	Enclosure rating		IP65				
	Ambient temperature		0 to +45°C 32 to 113 °F				
	Ambient storage temperature		-10 to +50°C 14 to 122 °F (No freezing)				
	Relative humidity		35 to 95% RH (No condensation)				
	Ambient luminance		Sunlight: 10000 lux, Incandescent lamp: 6000 lux, Fluorescent lamp: 2000 lux				
	Operating environment		No dust or corrosive gas present				
	Vibration		10 to 55 Hz Double amplitude 1.5 mm 0.06", 3 hours each in X, Y and Z directions				
Rating	Power voltage		5 VDC +5%, -10%				
	Current consumption		630 mA or less				
Weight		Approx. 160 g (including cable)					

\*1 The laser classification for FDA (CDRH) is implemented based on IEC60825-1 in accordance with the requirements of Laser Notice No.50.

\*2 Barcodes which fit into the visual field can be read.

### Communication unit



Model		N-R2	N-R4	N-UB	N-L20
Interface		RS-232C	RS-422A/485	USB-COM	Ethernet*
Code reader power supply		5 VDC ±5%, (650 mA)			
Terminal block	Input	2 inputs (IN1 and IN2)/Input type: Bidirectional voltage input/Maximum input voltage rating: 26.4 VDC/ Minimum ON voltage: 15 VDC/Maximum OFF current: 1 mA			
	Output	4 outputs (OUT1 to 4)/Output type: Photo MOS relay output/Output rated load: 30 VDC, 100 mA/ Leakage current when OFF: 0.1 mA or less/Residual voltage when ON: 1 V or less			
Environmental resistance	Ambient temperature/Relative humidity		0 to +50°C/35 to 85% RH (No condensation)		
	Ambient storage temperature		-20 to +60°C -4 to 140 °F		
	Operating environment		No dust or corrosive gas present		
Rating	Vibration		10 to 55 Hz Double amplitude 1.5 mm 0.06" (N-L20: 0.3 mm 0.01"), 2 hours each in X, Y and Z directions		
	Power voltage		24 VDC (+10%, -20%)/Current consumption: 380 mA max.		
Weight		Approx. 135 g	Approx. 135 g (excluding connector)	Approx. 155 g	Approx. 150 g


\*Supported protocol: TCP, UDP, FTP, BOOTP, EtherNet/IP<sup>TM</sup>, PROFNET, KV STUDIO, MC protocol, OMRON PLC link.

## DIMENSIONS


Unit: mm inch

### MAIN UNIT


#### SR-700/710/700HA

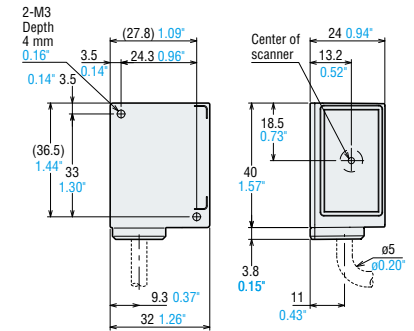

### MOUNTING BRACKET

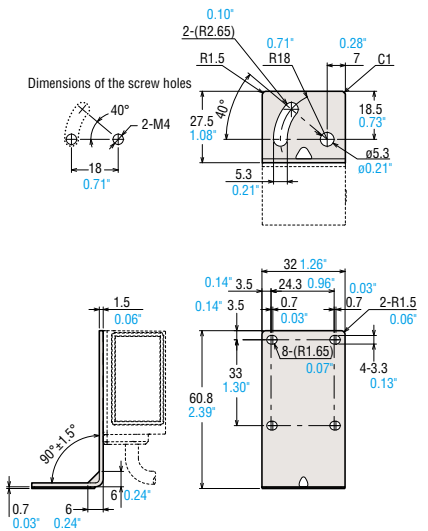

### HEAD CABLE

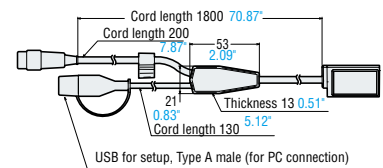

CALL TOLL FREE  
TO CONTACT YOUR LOCAL OFFICE  
**1-888-KEYENCE**  
1 - 8 8 8 - 5 3 9 - 3 6 2 3

www.keyence.com

**SAFETY INFORMATION**  
Please read the instruction manual carefully in order to safely operate any KEYENCE product.

### CONTACT YOUR NEAREST OFFICE FOR RELEASE STATUS

#### KEYENCE CORPORATION OF AMERICA

Head Office 500 Park Boulevard, Suite 200, Itasca, IL 60143, U.S.A.

PHONE: +1-201-930-0100 FAX: +1-855-539-0123

E-mail: keyence@keyence.com

AL Birmingham	CA San Jose	CO Denver	IL Chicago	MI Detroit	MO St. Louis	NC Raleigh	PA Philadelphia	TN Nashville	WI Milwaukee
AR Little Rock	CA Cupertino	FL Tampa	IN Indianapolis	MI Grand Rapids	NJ Elmwood Park	OH Cincinnati	PA Pittsburgh	TX Austin	
AZ Phoenix	CA Los Angeles	GA Atlanta	KY Louisville	MN Minneapolis	NY Rochester	OH Cleveland	SC Greenville	TX Dallas	
CA San Francisco	CA Irvine	IA Iowa	MA Boston	MO Kansas City	NC Charlotte	OR Portland	TN Knoxville	WA Seattle	

#### KEYENCE CANADA INC.

Head Office PHONE: +1-905-366-7655 FAX: +1-905-366-1122 E-mail: keyencemexico@keyence.com

Montreal PHONE: +1-514-694-4740 FAX: +1-514-694-3206 Windsor PHONE: +1-905-366-7655 FAX: +1-905-366-1122

#### KEYENCE MEXICO S.A. DE C.V.

PHONE: +52-55-8850-0100 FAX: +52-81-8220-9097

E-mail: keyencemexico@keyence.com

The information in this publication is based on KEYENCE's internal research/evaluation at the time of release and is subject to change without notice.  
Company and product names mentioned in this catalog are either trademarks or registered trademarks of their respective companies.  
The specifications are expressed in metric units. The English units have been converted from the original metric units.  
Copyright (c) 2017 KEYENCE CORPORATION. All rights reserved.

KA1-1017

SR700-KA-C4-US 1067-1 611F28